






OUTDOOR STRETCH DOUBLE

TECHNICAL DATA SHEET

June 2018

Outdoor Stretch is a double-coated, flame-retardant and waterproof stretch fabric ideal for outdoor applications. This outdoor fabric is 145 cm wide and is flexible enough to create any 3D shape. It can be used as dim-out fabric and even works as a projection surface. The double-sided white and grey fabric is flame retardant and can be custom-sewn in our workshop or custom-printed on demand.

» ARTICLE CODE 2965 0145 0659	» WIDTH 145 cm	» LENGTH ± 100 m	» WEIGHT 290 g/m ²
» COMPOSITION 40% PES + 60% PU coating	» CARE INSTRUCTIONS     		

» FLAME RESISTANCE NFP 92-503 DIN 4102	CLASS M2 CLASS B1
-----------------------------------------------------	----------------------

» WASHING	Washing (40°C or 95°C) must be done with neutral detergents; softening agents are not allowed. Undyed fabrics may be washed following the ISO 6330 norm, Part 9A and dyed fabrics following the ISO 6330 norm Part 3A.
» DISINFECTIONS	In general, the PVC-coated products resist well to most of the currently used surface disinfectants. Nevertheless, we advise to test the particular surface disinfectant in advance or to contact us in case.
» DRYING	Adequate drying is a crucial factor in the care and maintenance of coated articles. Drying may be effected by hanging out, spinning or tumbling at temperatures up to 60°C. Do not press or mangle!
» STORING	Store in a dry area, at room temperature. Avoid excessive pressure and contact with non-colourfast materials. Try not to expose the PVC-Coating to excessive sunlight (UV-radiation).

OUTDOOR STRETCH DOUBLE

TECHNICAL DATA SHEET

June 2018

» **SHRINKAGE AFTER WASHING**

ISO 5077: 1984
Warp: 0 [+/-4] %
Weft: 0 [+/-2] %

» **BREAKING STRENGTH**

ISO 13934: 1999
Warp: 400 N/5cm
Weft: 300 N/5cm

» **WATERPROOFNESS**

ISO 811: 1981
Before washing: 2000 mm
After washing: 2000 mm


» **TEAR STRENGTH**

ISO 4674A1: 1977
Warp: 50 N
Weft: 45 N

» **BREAKING EXTENSION**

ISO 13934: 1999
Warp: 90 %
Weft: 120 %

» **AVAILABLE COLOURS**

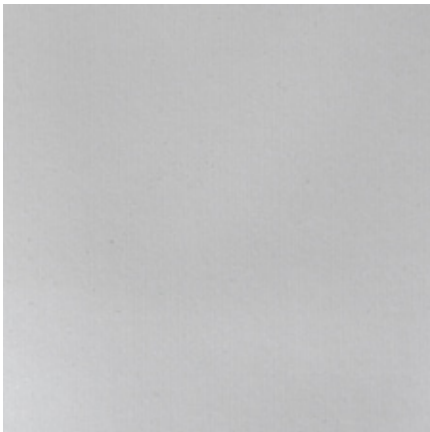

0659