

MINERAL WOOL



Light and resilient panel for sound absorption that is non-flammable. An excellent material for soundproofing or thermal filling.

SPECIFICATIONS

Item	Width	Length	Weight	Thickness	Composition
8187	60 cm	± 100 cm	45 kg/m ³	2 cm	100% MF
		± 120 cm	35 kg/m ³	4 cm	

FR standard

EN 13501-1 / A1

Airflow resistance


EN 29053
≥ 10 kPa.s/m²

Temperature resistance maximum

EN 12667
0,037 W/m.K

MINERAL WOOL

SOUND ABSORPTION

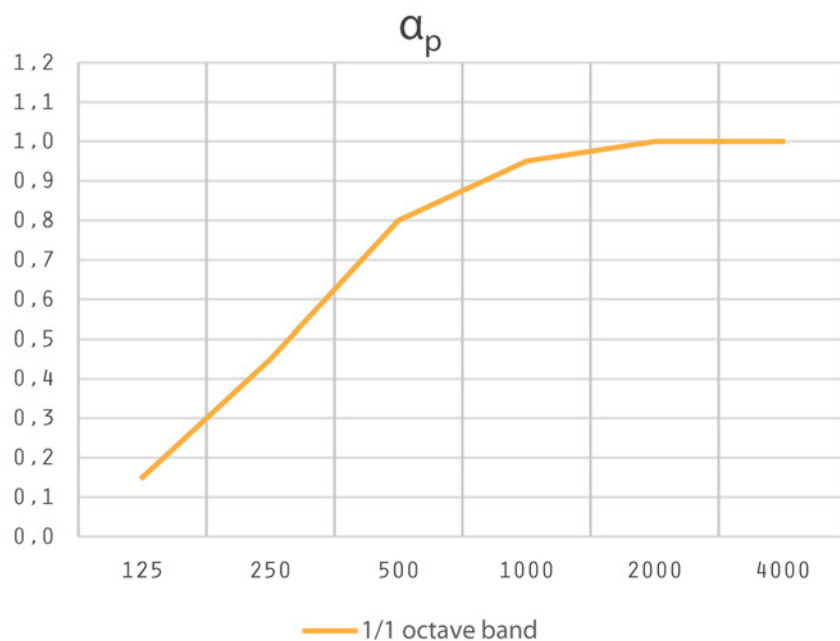

According to EN ISO 354 - sample placed directly on the floor