


## MOLTON

### TECHNICAL DATA SHEET

October 2022

Extra wide, budget-friendly stage masking fabric. Raised on both sides.

|                             |   |                 |                      |
|-----------------------------|---|-----------------|----------------------|
| » <b>ARTICLE CODE</b>       | » <b>WIDTH</b>  | » <b>LENGTH</b> | » <b>WEIGHT</b>      |
| 1400 0200 0007 (only black) | 200 cm  | ± 60 m          | 300 g/m <sup>2</sup> |
| 1400 0300 #                 | 300 cm  |                 |                      |
| » <b>COMPOSITION</b>        | » <b>CARE INSTRUCTIONS</b>  |                 |                      |
| 100% CO                     |  |                 |                      |


#### » FLAME RESISTANCE

NF P 92-503 / M1  
 DIN 4102 / B1  
 BS 5867 PART 2B (2008) / pass  
 EN 13773 (2003) / class 1  
 GB 8624-2012 / B1  
 NFPA 701 (2020) / pass

#### » COLOUR FASTNESS TO RUBBING (DRY)

NF EN ISO 105-X12 : 2016  
 Warp: 2-3 · Weft: 2-3

#### » AVAILABLE COLOURS

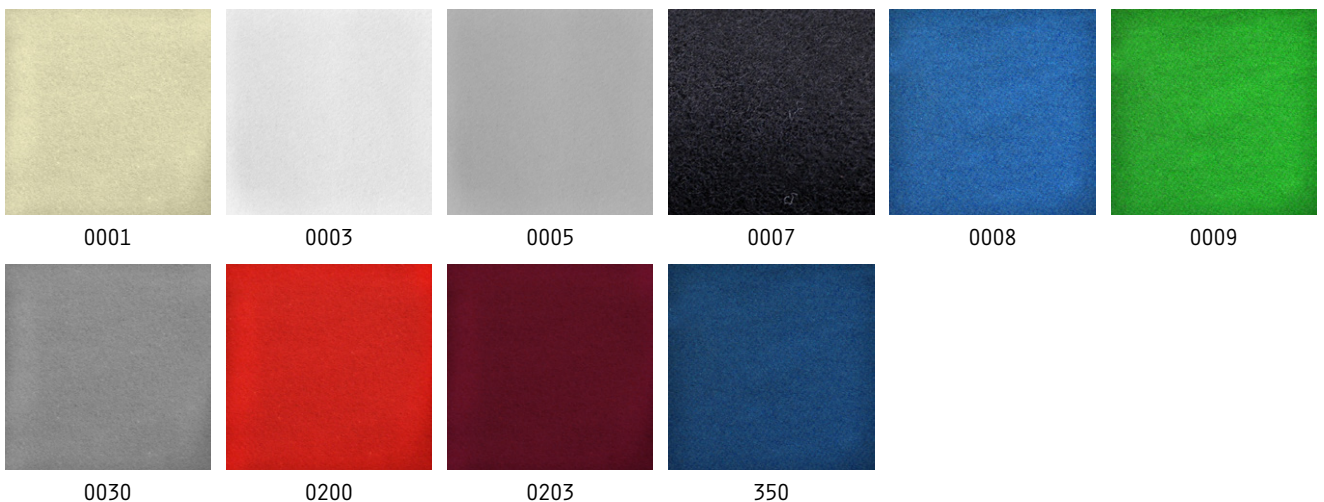


## MOLTON

### TECHNICAL DATA SHEET

October 2022

#### SOUND ABSORPTION

full box pleated curtain • 10 cm from the wall

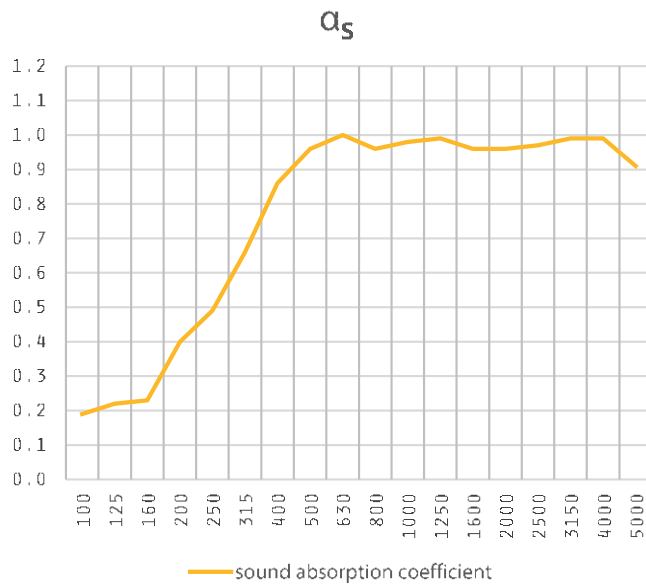

| f(Hz) | $\alpha_s$ |
|-------|------------|
| 100   | 0.19       |
| 125   | 0.22       |
| 160   | 0.23       |
| 200   | 0.40       |
| 250   | 0.49       |
| 315   | 0.66       |
| 400   | 0.86       |
| 500   | 0.96       |
| 630   | 1.00       |
| 800   | 0.96       |
| 1000  | 0.98       |
| 1250  | 0.99       |
| 1600  | 0.96       |
| 2000  | 0.96       |
| 2500  | 0.97       |
| 3150  | 0.99       |
| 4000  | 0.99       |
| 5000  | 0.91       |

ISO 11654  
 $\alpha_w = 0.80(H)$